



HIR-C16/L572-P01/TR

Received	
<input checked="" type="checkbox"/>	MASS PRODUCTION
<input type="checkbox"/>	PRELIMINARY
<input type="checkbox"/>	CUSTOMER DESIGN
DEVICE NO. : DIR-0001526	
PAGE : 8	

Revised record		
REV.	DESCRIPTION	RELEASE DATE
1	New spec	2015.12.04
2	Modify radiated power bin	2016.11.15

EVERLIGHT
EVERLIGHT
EVERLIGHT

DATASHEET

Technical Data Sheet

High Power Infrared LED

HIR-C16/L572-P01/TR



Features

- Small package with high efficiency
- Soldering methods:SMT
- Pb free
- The product itself will remain within RoHS compliant version.
- Compliance with EU REACH
- Compliance Halogen Free(Br < 900ppm, Cl < 900ppm, Br+Cl < 1500ppm)
- Peak wavelength $\lambda_p=850\text{nm}$
- Thermal resistance (junction to lead): $18^\circ\text{C}/\text{W}$.

Description

- HIR-C16/L572-P01/TR series is an infrared emitting diode in miniature SMD package which is molded in a water clear silicone with spherical top view lens.
- The device is spectrally matched with silicon photodiode, Phototransistor.

Applications

- CCD Camera
- Infrared applied system

Device Selection Guide

LED Part No.	Chip Material
HIR-C16/L572-P01/TR	GaAlAs

Absolute Maximum Ratings (Ta=25°C)

Parameter	Symbol	Rating	Unit
Continuous Forward Current	I _F	350	mA
Peak Forward Current *1	IFP	1.0	A
Reverse Voltage	VR	5	V
Operating Temperature	Topr	-40~ +85	°C
Storage Temperature	Tstg	-40 ~ +100	°C
Junction temperature	Tj	115	°C
Thermal resistance (junction to leadframe)	Rth(j-L)	18	°C/W
Power Dissipation @IF=500mA	Pd	1	W

Notes: *1: I_{FP} Conditions--Pulse Width ≤ 100μs and Duty ≤ 1%.

*2Note: We suggest that customer should add the heat sink with HIR-C16/L572-P01/TR to exclude the heat.

Electro-Optical Characteristics (Ta=25°C)

Parameter	Symbol	Min.	Typ.	Max.	Unit	Condition
Total Radiated Power	Po	150	210	--	mW	I _F =350mA
		200	270	--		I _F =500mA
		400	500	--		I _F =1000mA
Radiant Intensity	I _E	--	65	--	mWsr	I _F =350mA
Peak Wavelength	λ _p	--	850	--	nm	I _F =350mA
Spectral Bandwidth	Δλ	--	40	--	nm	I _F =350mA
Forward Voltage	V _F	1.4	2.0	--	V	I _F =350mA
		1.6	2.2	--		I _F =500mA
Reverse Current	I _R	--	--	10	μA	V _R =5V
View Angle	2θ _{1/2}	--	130	--	deg	I _F =20mA

Bin Code List



Condition : $I_F=350\text{mA}$

Unit : mW


Radiated Power

Bin Number	A	B	C
Min	150	200	250
Max	200	250	300

Including test tolerance $\pm 10\%$

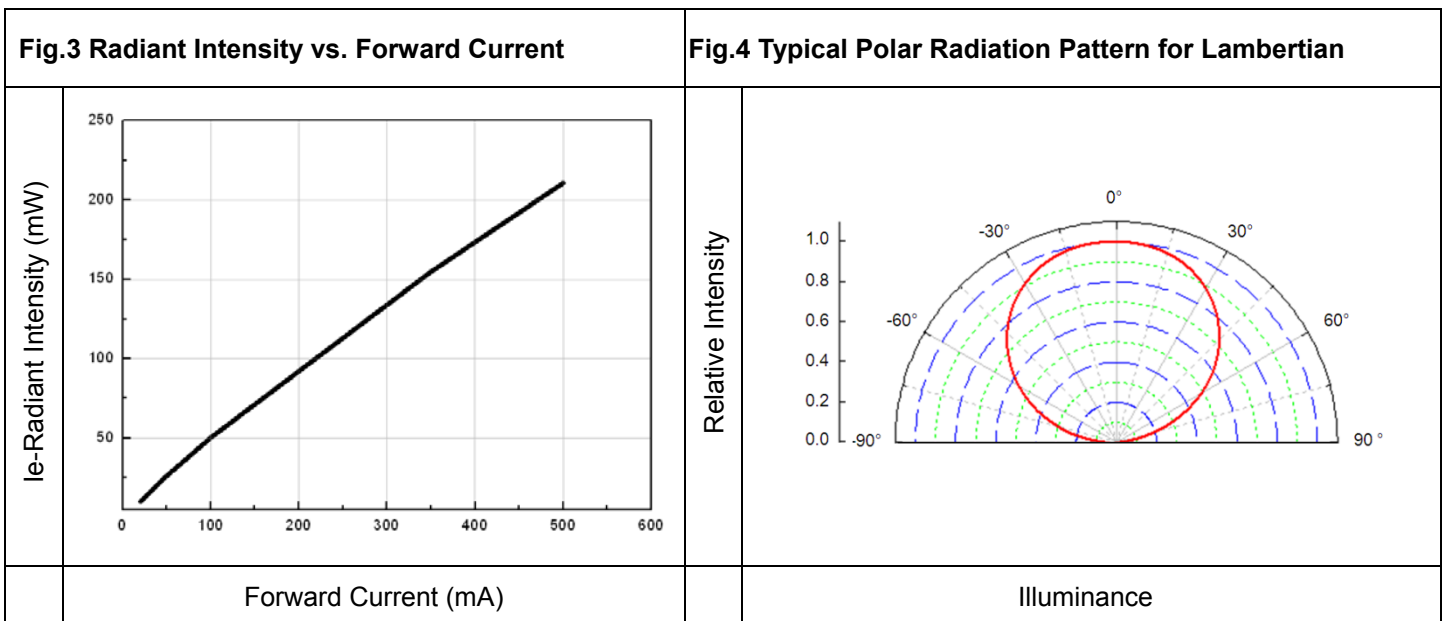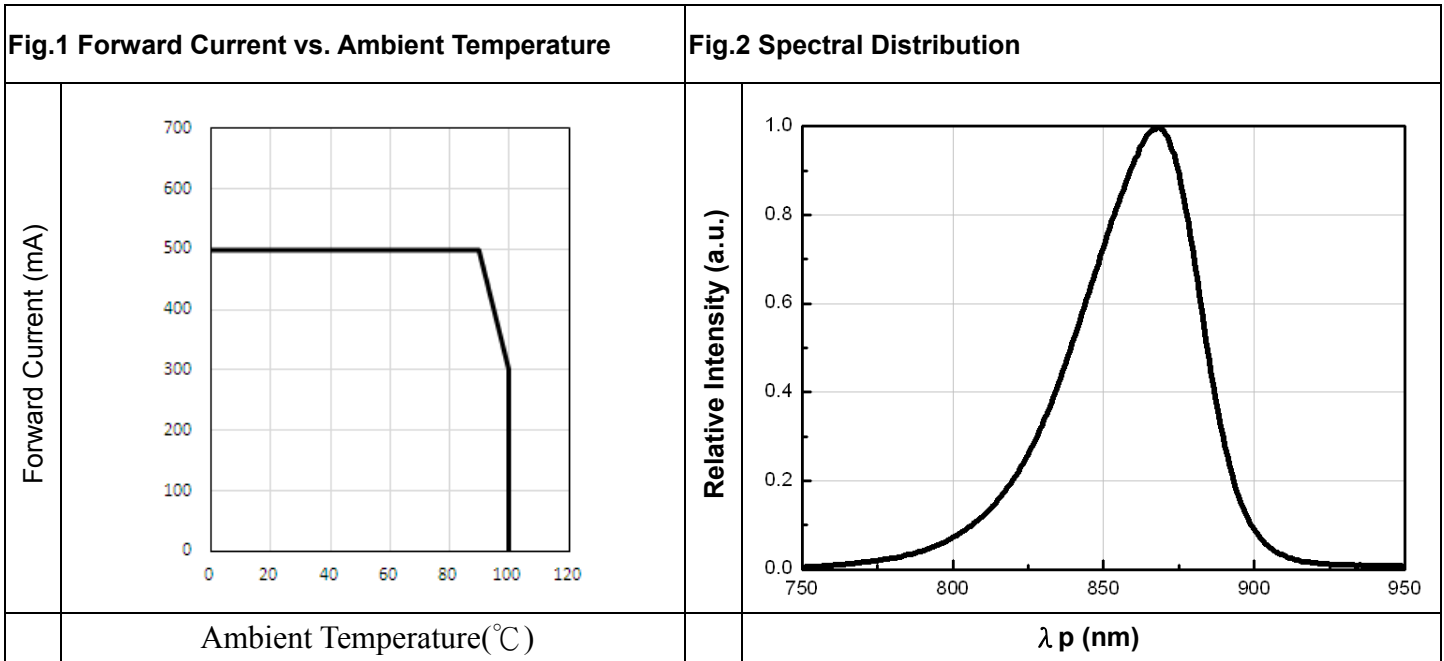


Package Dimension

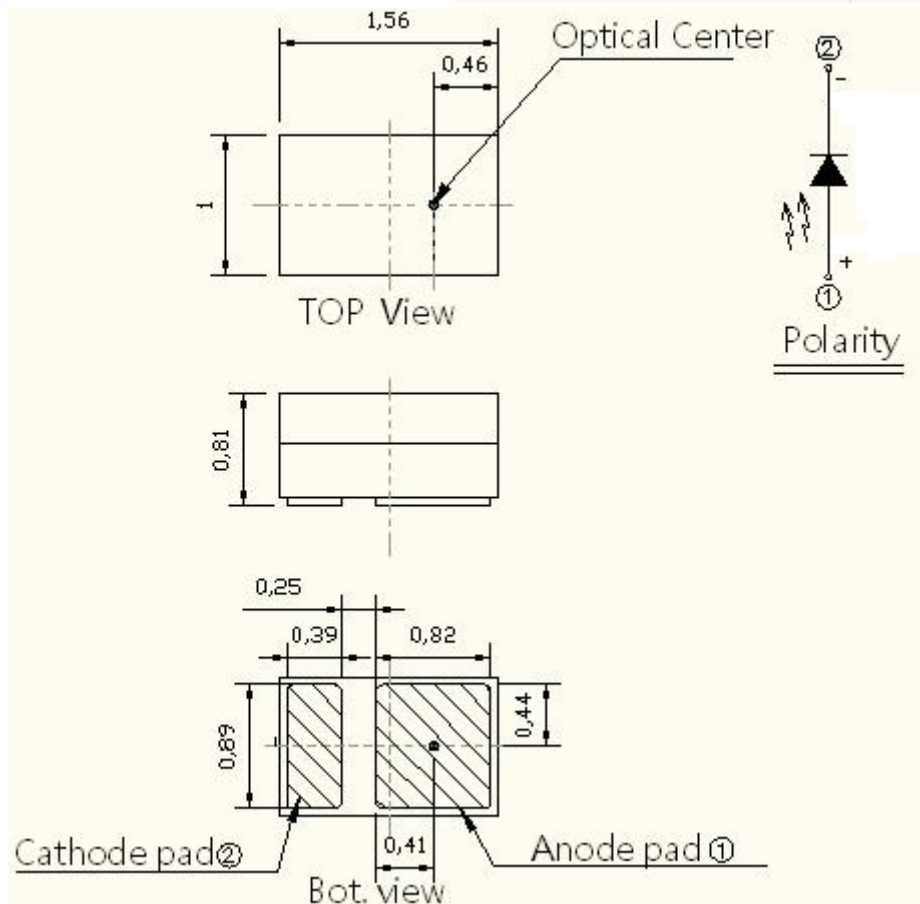

Note:

1. Dimensions are in millimeters.
2. Tolerances unless mentioned are $\pm 0.1\text{mm}$.

Pad Configuration

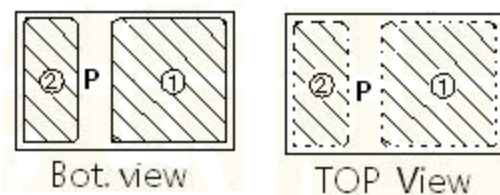


PAD	FUNCTION
1	ANODE
2	CATHODE
P	THERMAL PAD

Reflow Soldering Characteristics

For Reflow Process


- a. C16 series are suitable for SMT processes.
- b. Curing of glue in oven must be according to standard operation flow processes.

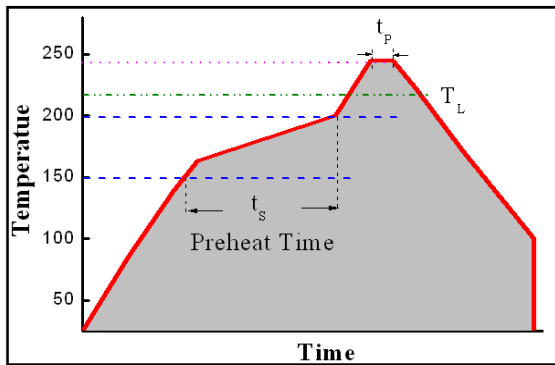

Profile Feature	Lead Free Assembly
Ramp-Up Rate	2-3 °C/S
Preheat Temperature	150-200 °C
Preheat Time (t_s)	60-120 S
Liquid Temperature (T_L)	217 °C
Time maintained above T_L	60-90 S
Peak Temperature (T_P)	240±5 °C
Peak Time (t_p)	Max 20 S
Ramp-Down Rate	3-5 °C/S


- c. Reflow soldering should not be done more than twice.
- d. In soldering process, stress on the LEDs during heating should be avoided.
- e. After soldering, do not bend the circuit board.

Package Dimensions

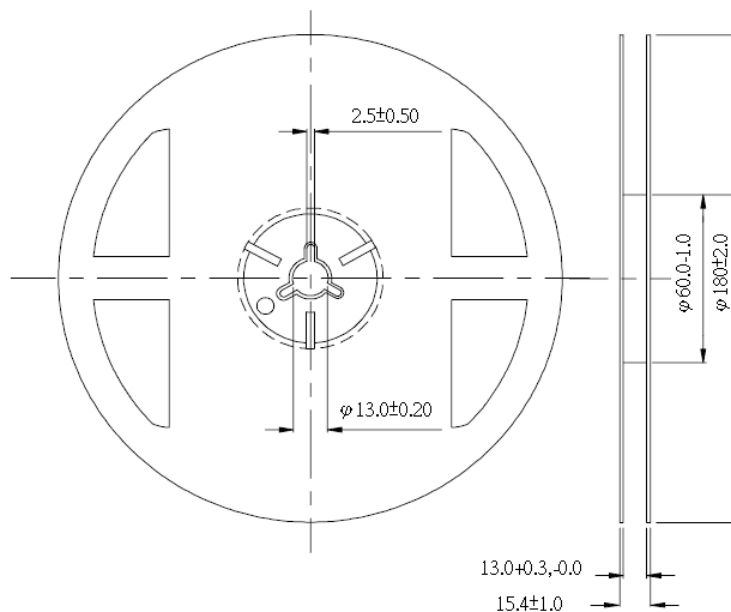


- Note: 1. Dimensions are in millimeters
 2. The tolerances unless mentioned is ± 0.1 mm

Carrier Tape Dimensions: Loaded quantity 2000 PCS per reel.

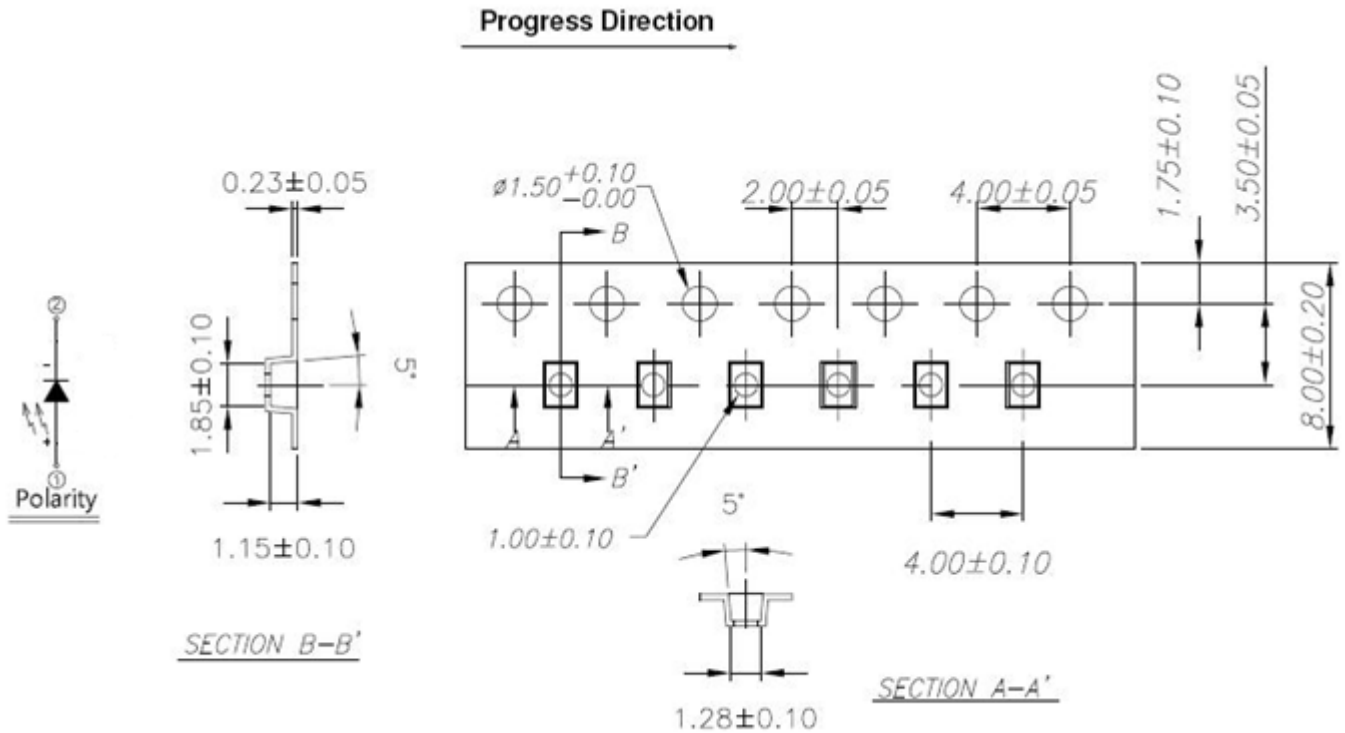

- Note: 1. Dimensions are in millimeters
 2. The tolerances unless mentioned is ± 0.1 mm

Moisture Resistant Packaging

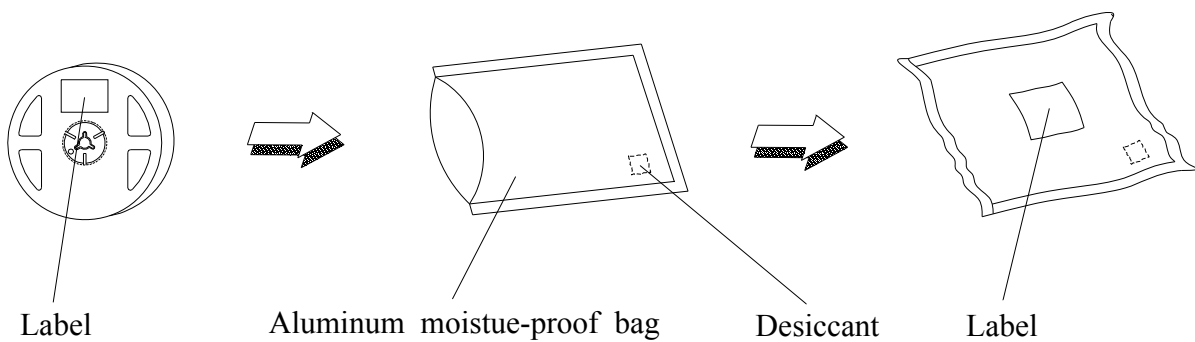

Moisture Resistant Packing Materials

Label Form Specification



CPN: Customer's Production Number
P/N : Production Number
QTY: Packing Quantity
CAT: Ranks
HUE: Peak Wavelength
REF: Reference
LOT No: Lot Number
MADE IN TAIWAN: Production Place

DISCLAIMER

1. EVERLIGHT reserves the right(s) on the adjustment of product material mix for the specification.
2. The product meets EVERLIGHT published specification for a period of twelve (12) months from date of shipment.
3. The graphs shown in this datasheet are representing typical data only and do not show guaranteed values.
4. When using this product, please observe the absolute maximum ratings and the instructions for using outlined in these specification sheets. EVERLIGHT assumes no responsibility for any damage resulting from the use of the product which does not comply with the absolute maximum ratings and the instructions included in these specification sheets.
5. These specification sheets include materials protected under copyright of EVERLIGHT. Reproduction in any form is prohibited without obtaining EVERLIGHT's prior consent.
6. This product is not intended to be used for military, aircraft, automotive, medical, life sustaining or life saving applications or any other application which can result in human injury or death. Please contact authorized Everlight sales agent for special application request.